



2820 S. English Station Road - Louisville, KY 40299

TEST NO. 05-403Rev3

Paint Arrestance Filter Test Report

page 1 of 1

Test Information

Filter Manufacturer

Viskon Aire

Filter Description

Super PS

Paint Description

S.W. H67WC55 Permaclad

Paint Spray Method




Speedaire 4F342 @ 40 PSI

Spray Feed Rate

136 Gms/Min

Air Velocity

150 FPM

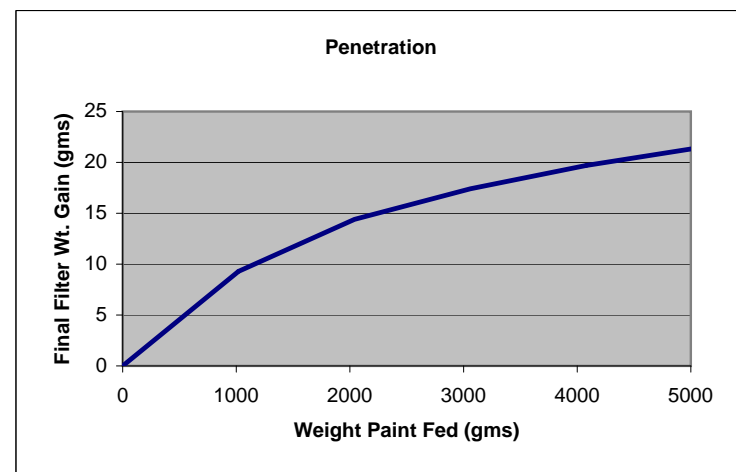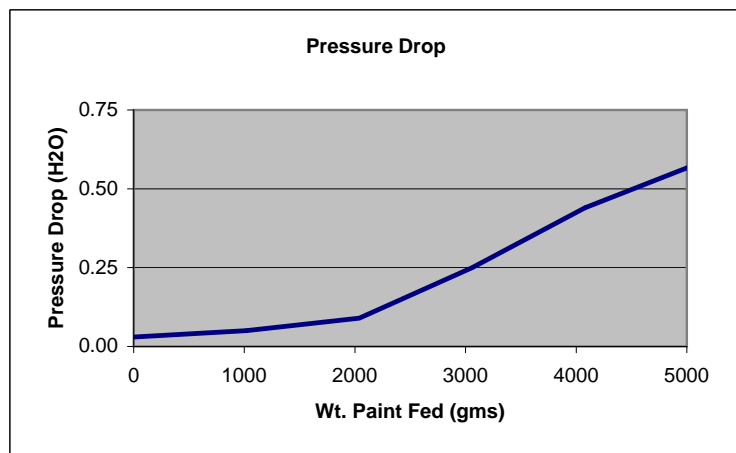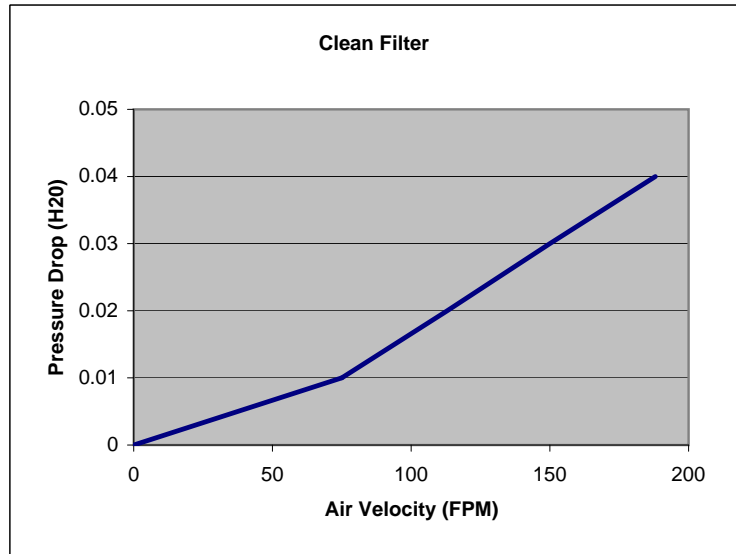

Test Results

Initial Pressure Drop Clean

.03 In. W.C.

Final Pressure Drop Loaded

.44 In. W.C.

Paint Holding Capacity

2628.0 Gms

Paint Run -Off

269.6 Gms

Weight Gain-Final Filter

19.7 Gms = Penetration

Average Removal Efficiency

99.33%

REMARKS	Paint Fed For 30 Minutes Total			
	EPA 40 CFR Part 63 Compliant			
Requestor Information	Test Requestor	Steve Ogle	Phone Number	615-734-1600
	Company Name	Leggett & Platt	Fax Number	615-734-1641
	Company Address	400 Davidson St., Nashville TN	Date Requested	11-Jul-05
Test Operator Information	Test Performed by:	RAS	Completion Date	14-Jul-05